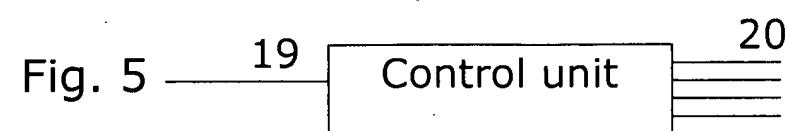
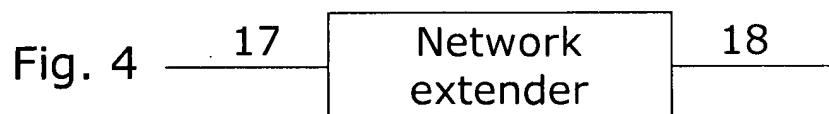


Fig. 2a



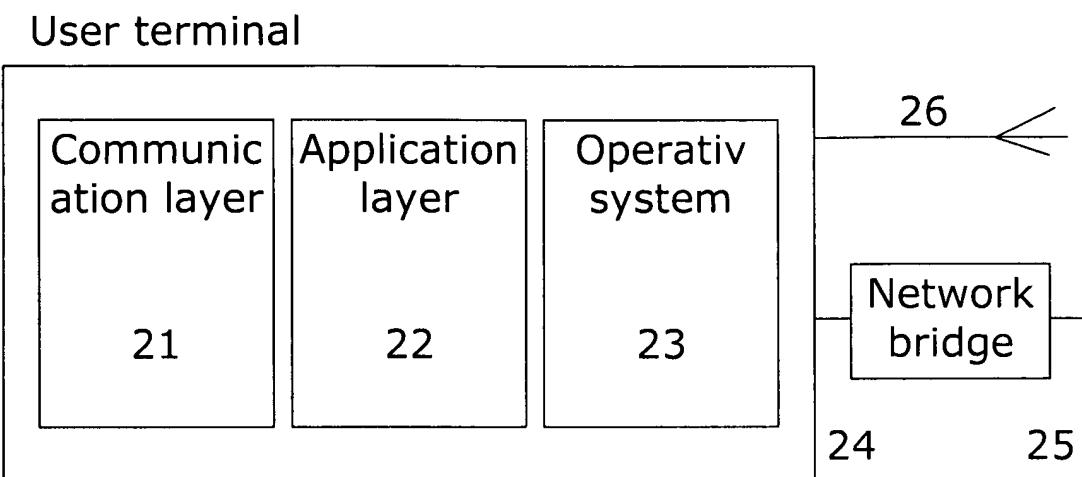


Fig. 6

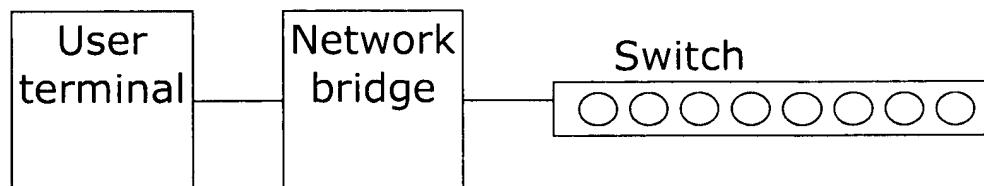
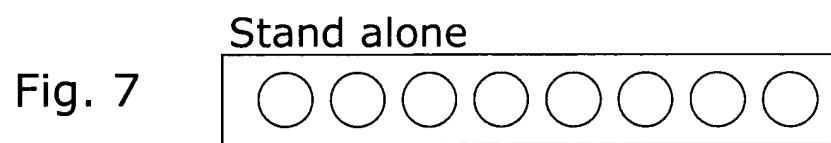


Fig. 8

Fig. 9

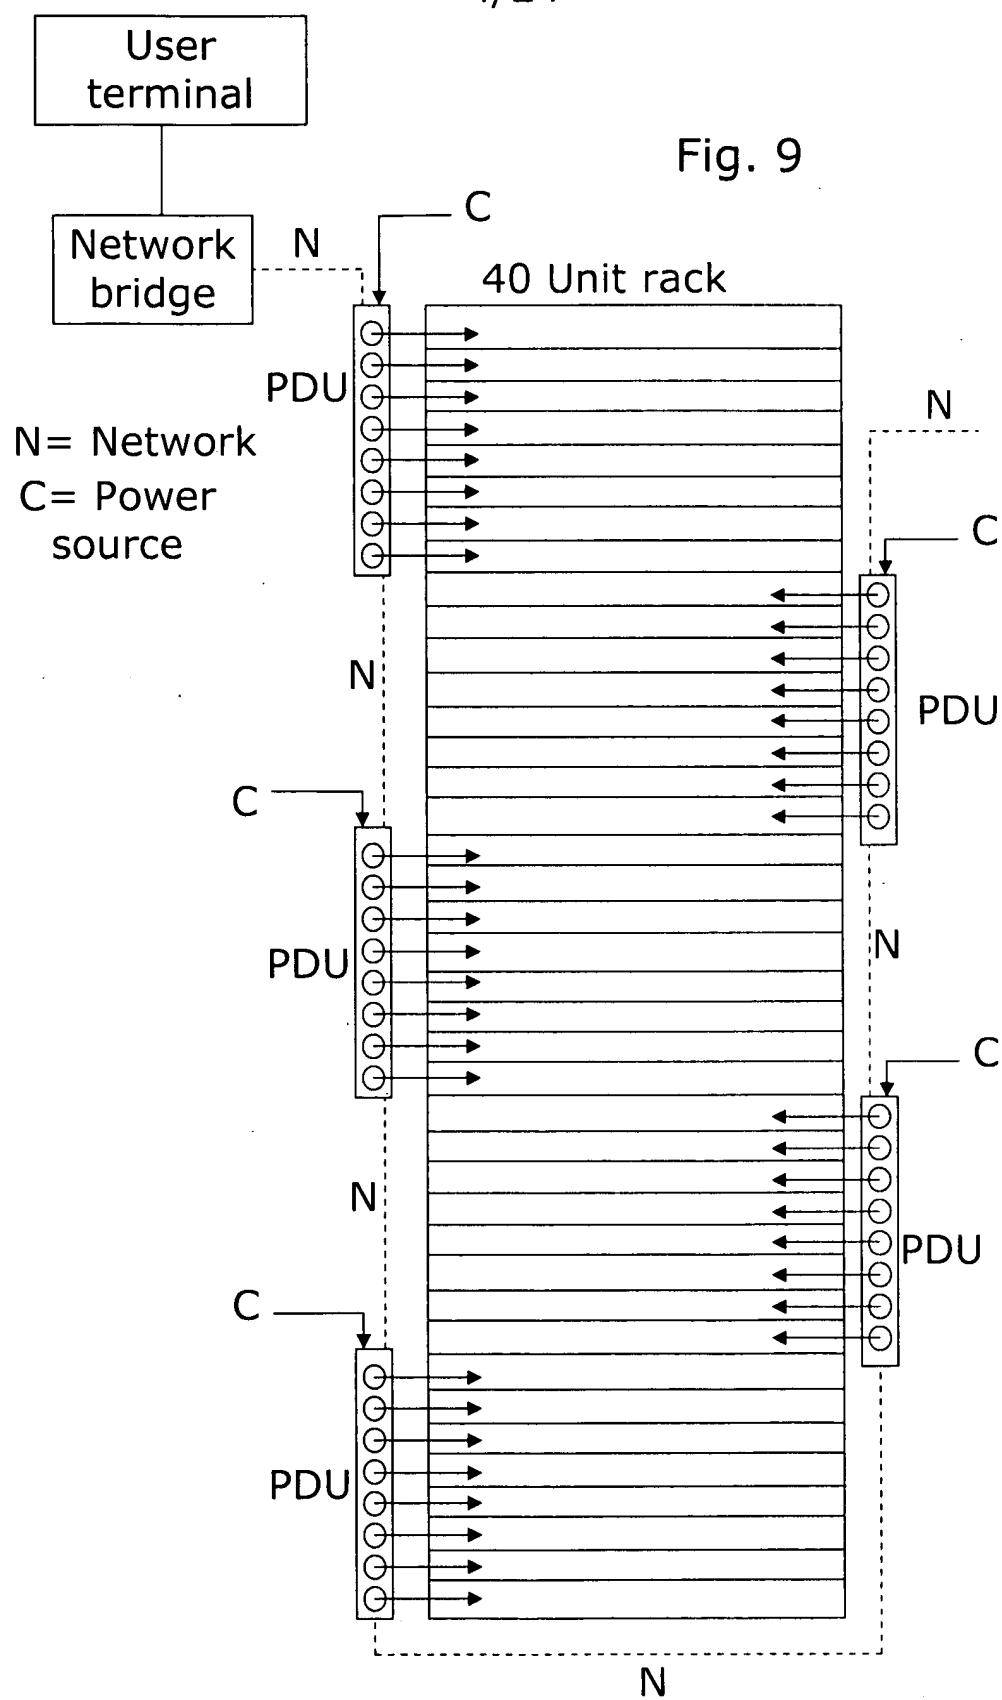


Fig. 10

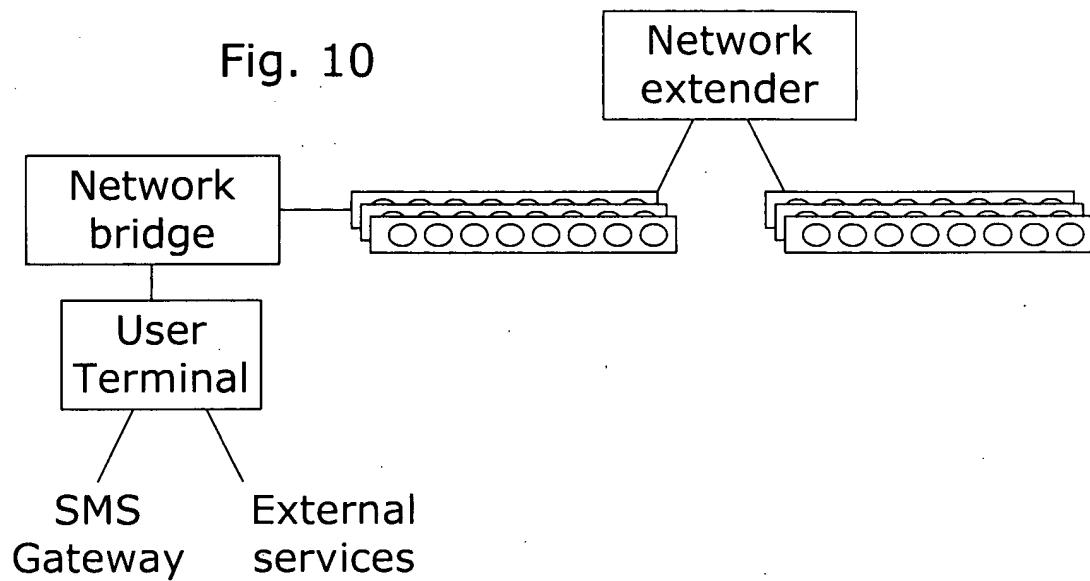


Fig. 11

Phase 1

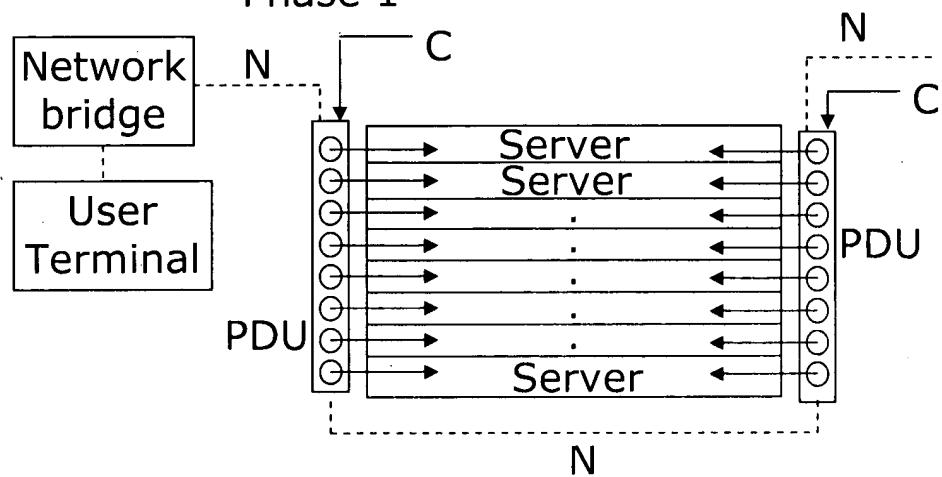


Fig. 12



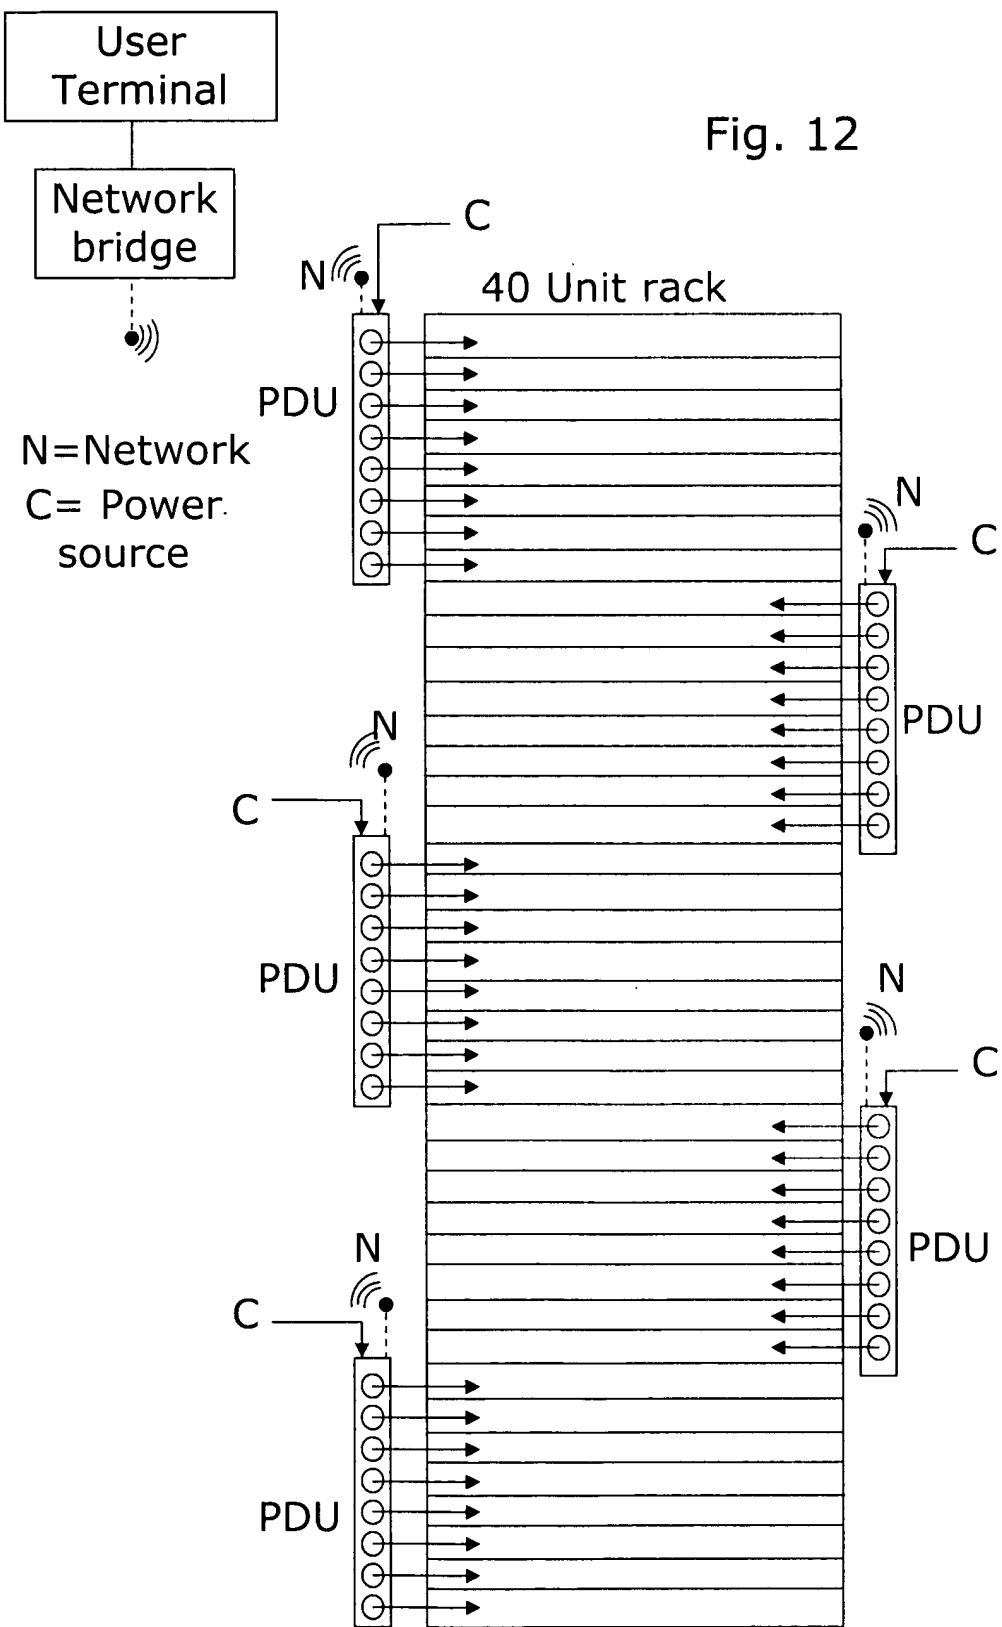



Fig. 13

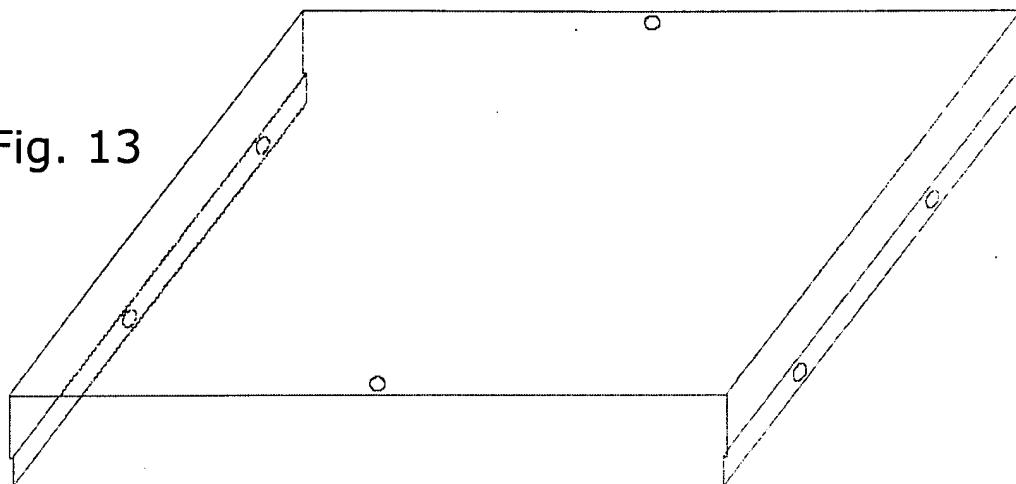

Top

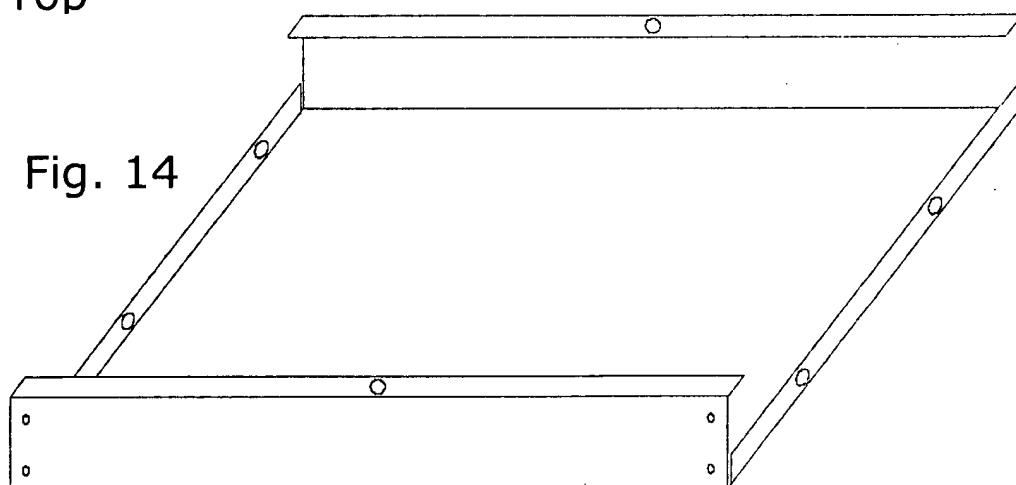

Bottom

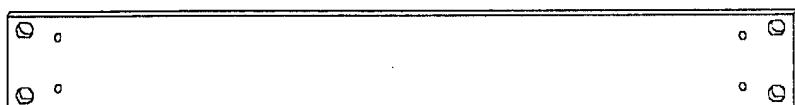

Front

Fig. 15

Fig. 16

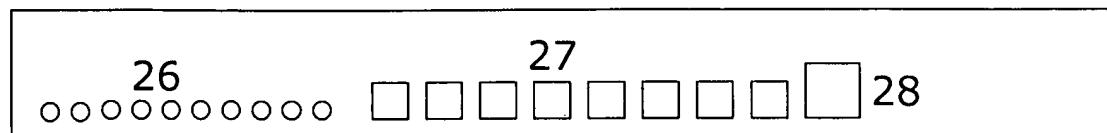


Fig. 17

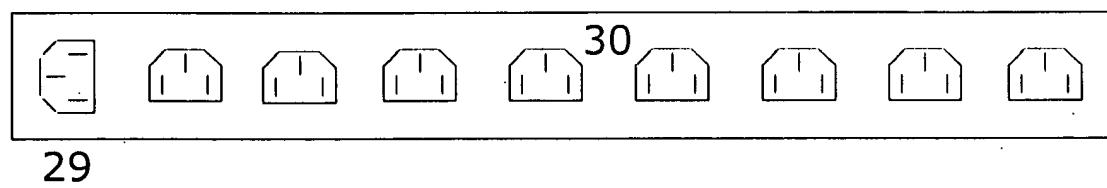


Fig. 18

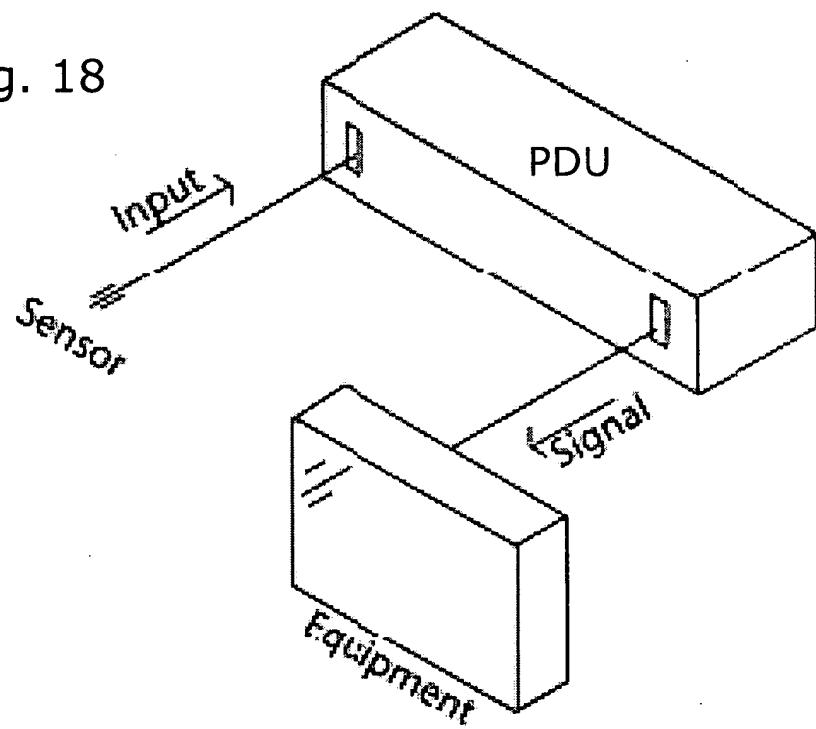


Fig. 19


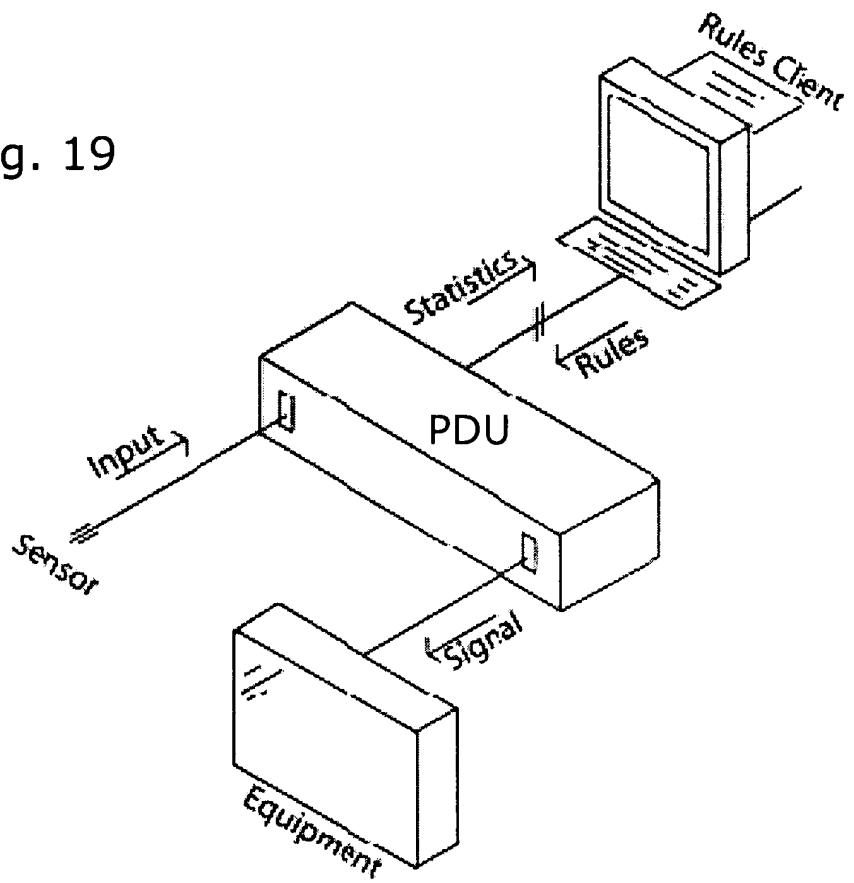


Fig. 20

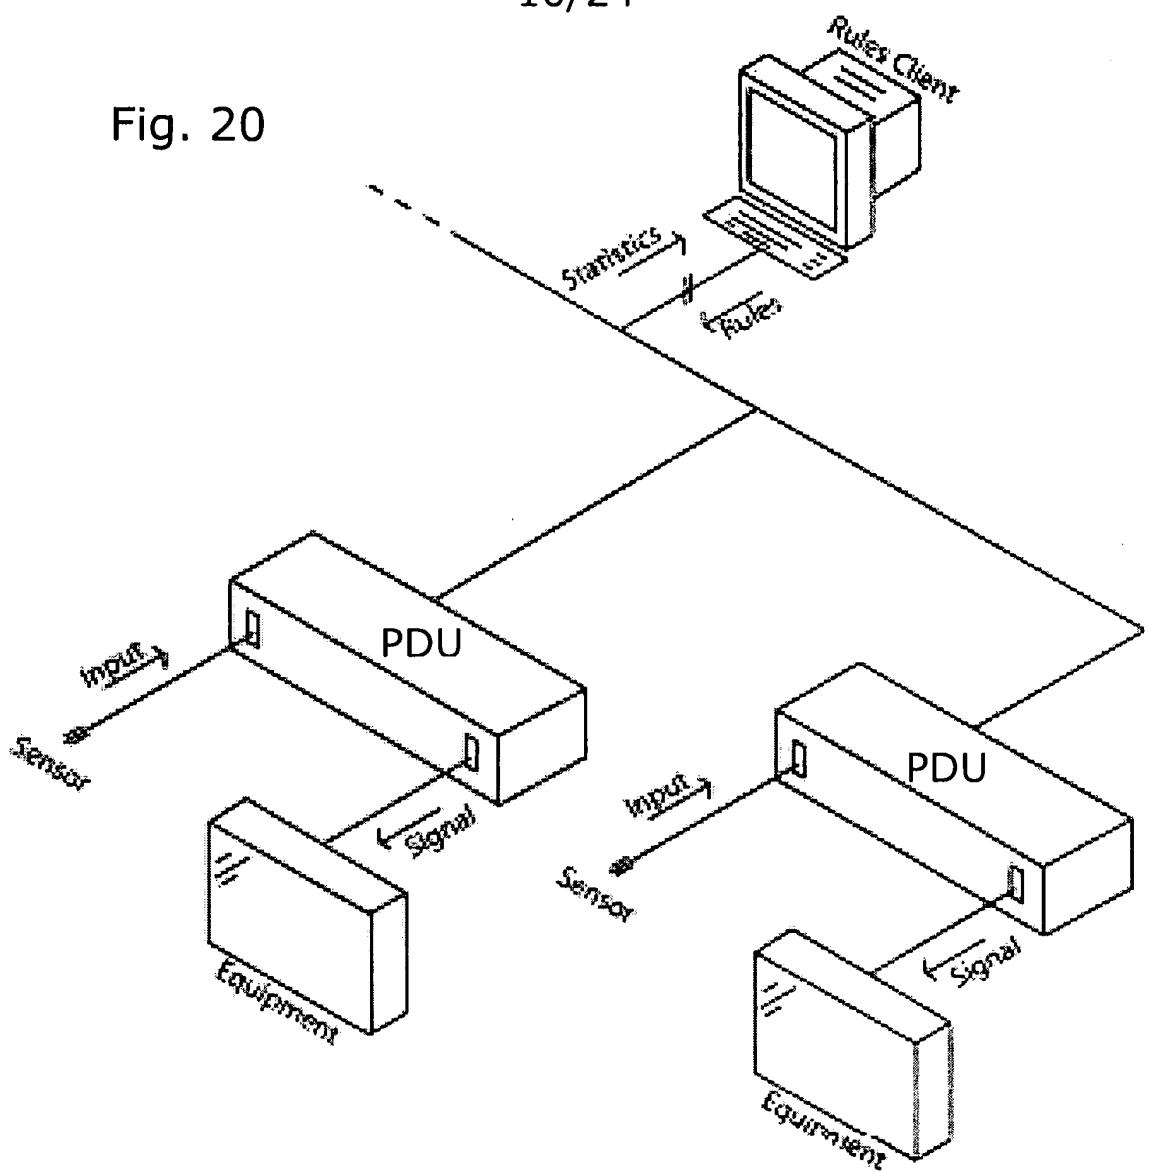

11/24

Fig. 21

DC=Daisy Chain
E= Ethernet


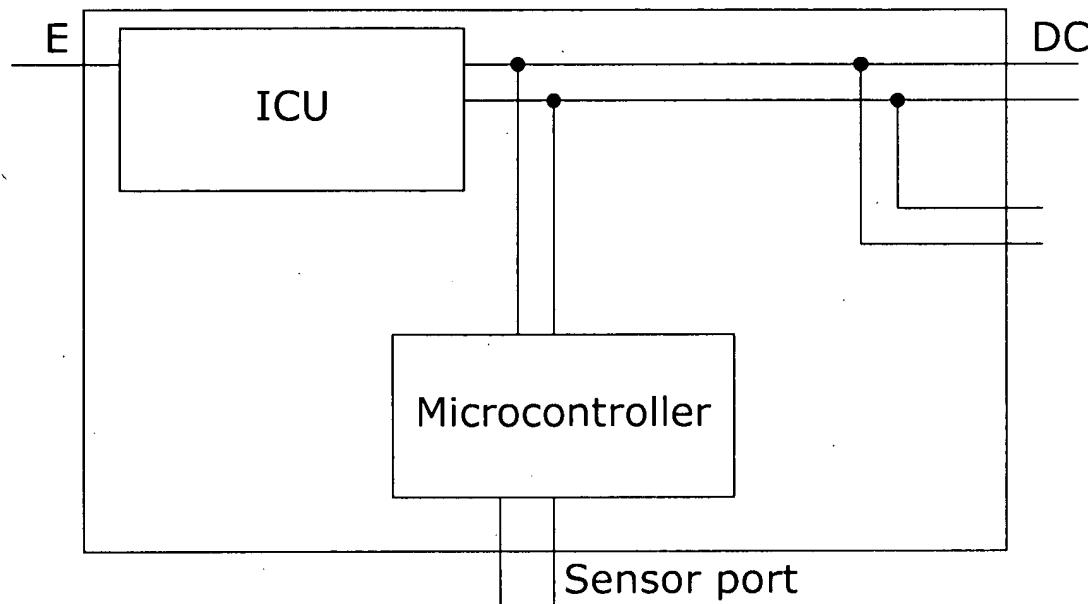


Fig. 22

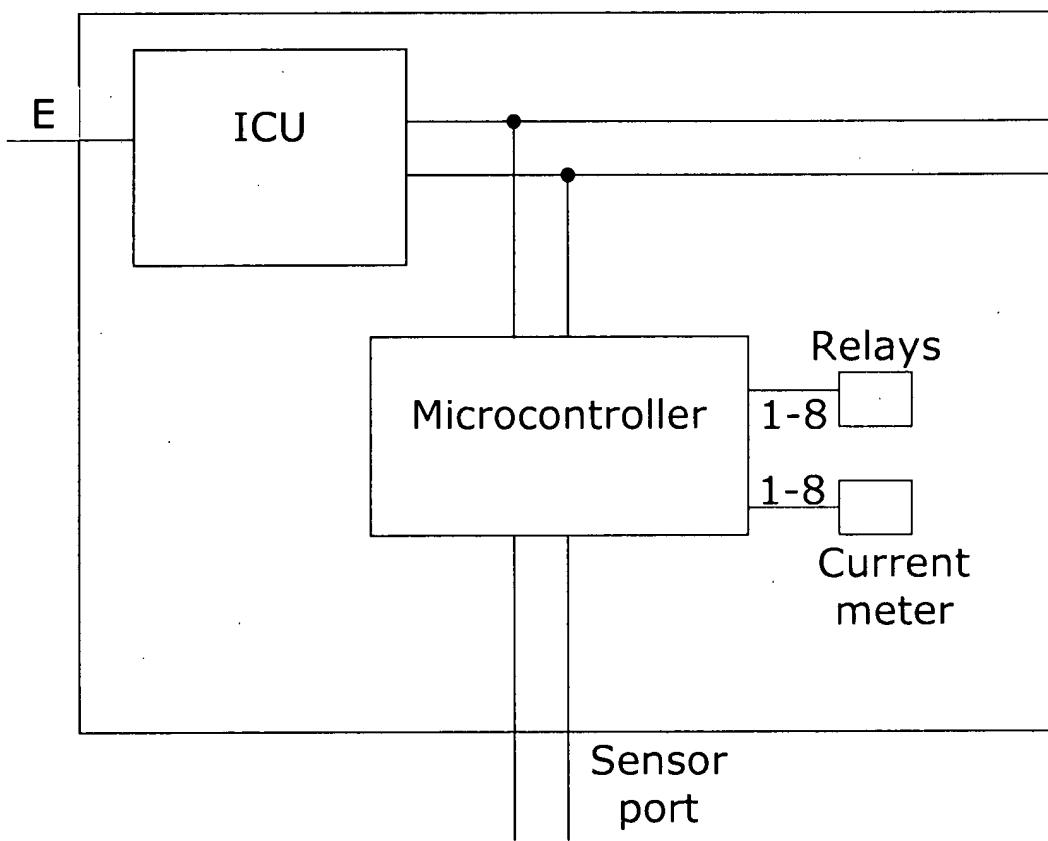

12/24

Fig. 23


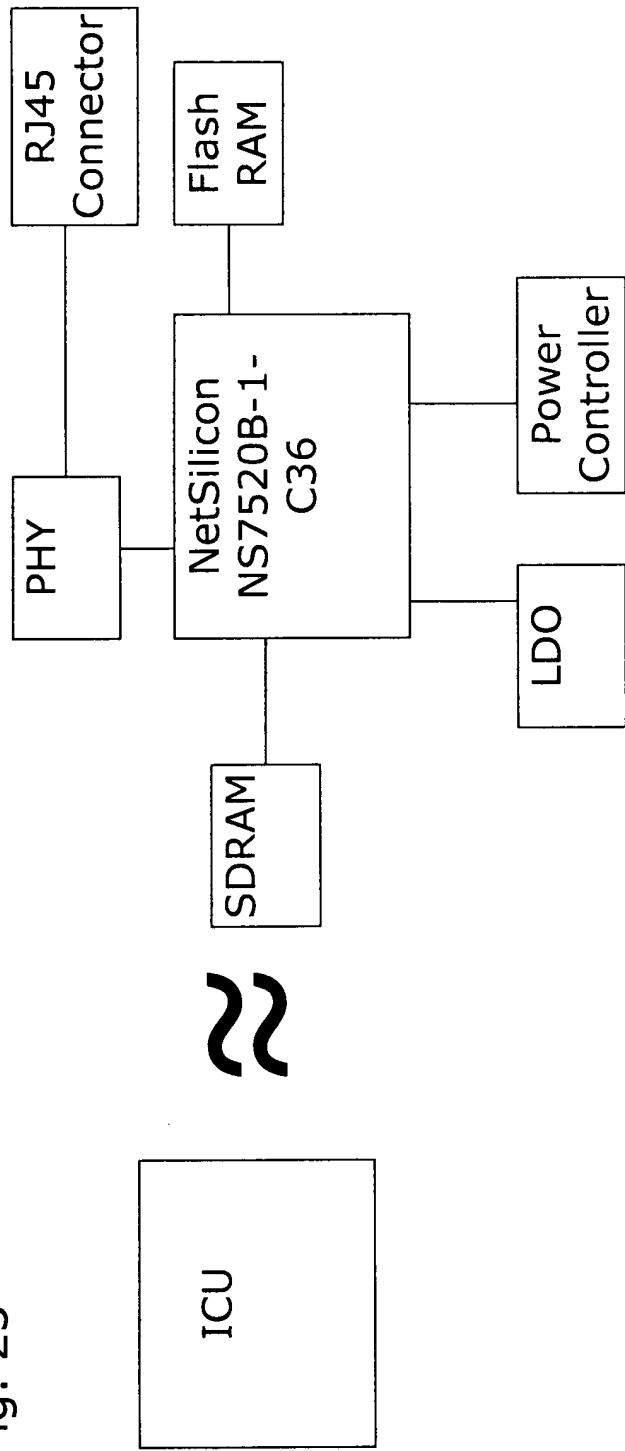


Fig. 24

13/24 Internal communication

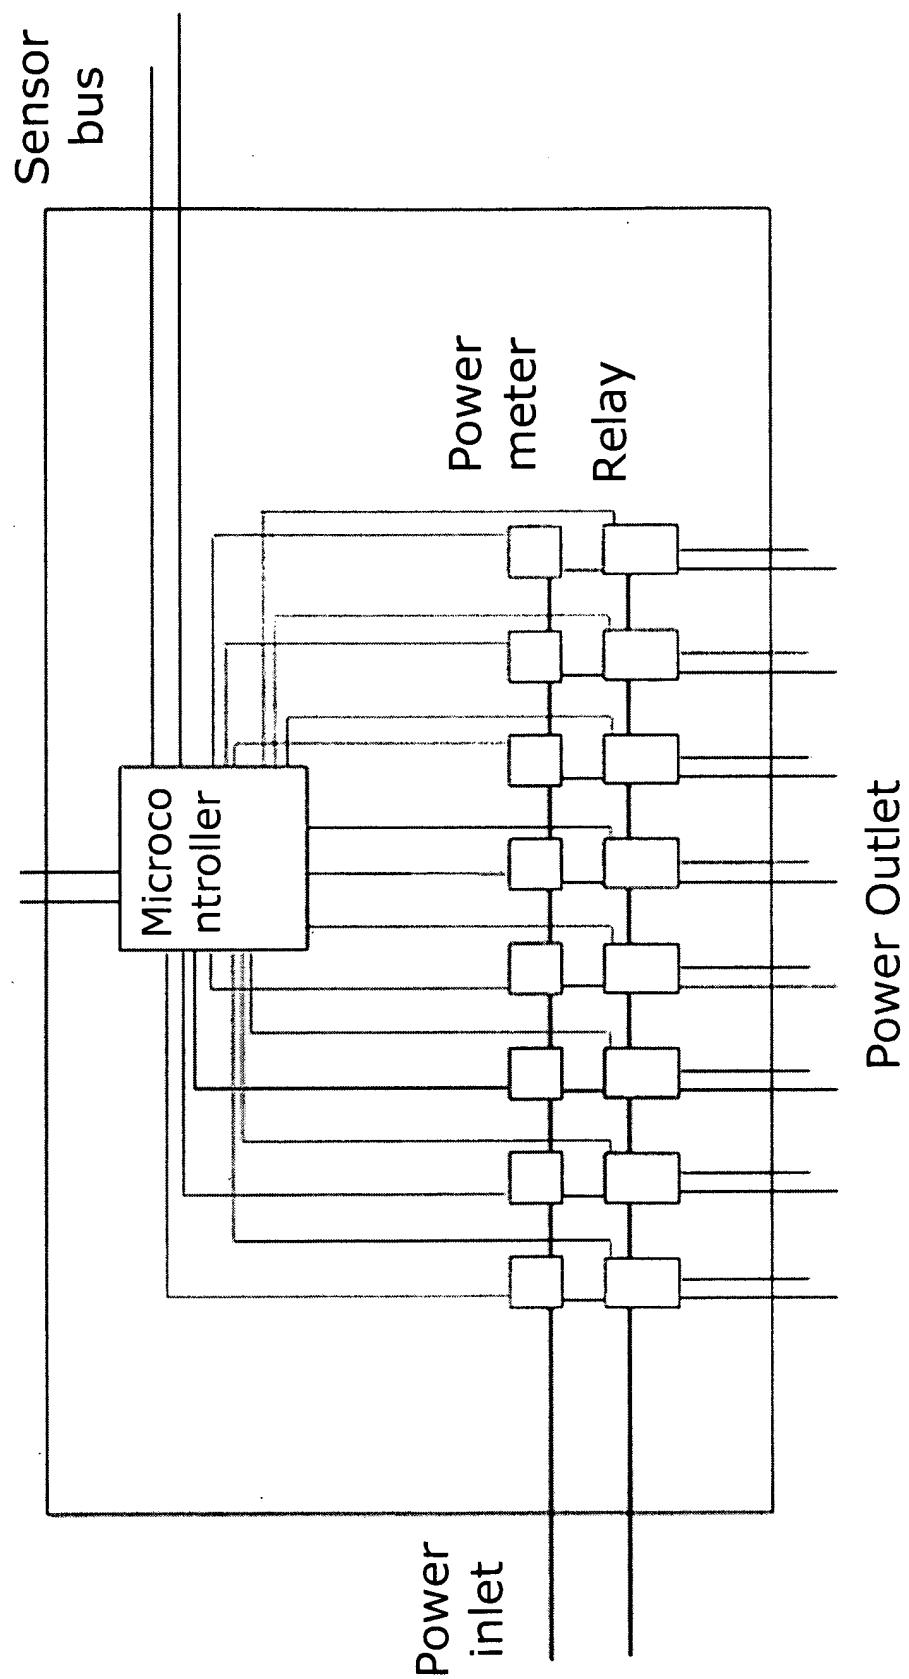

14/24

Fig. 25

	31
	32
Outlets 34	Drag and drop column head to group IP USE Reboot Subnet_mask Gateway
	33
Sensors 35	

Fig. 26a

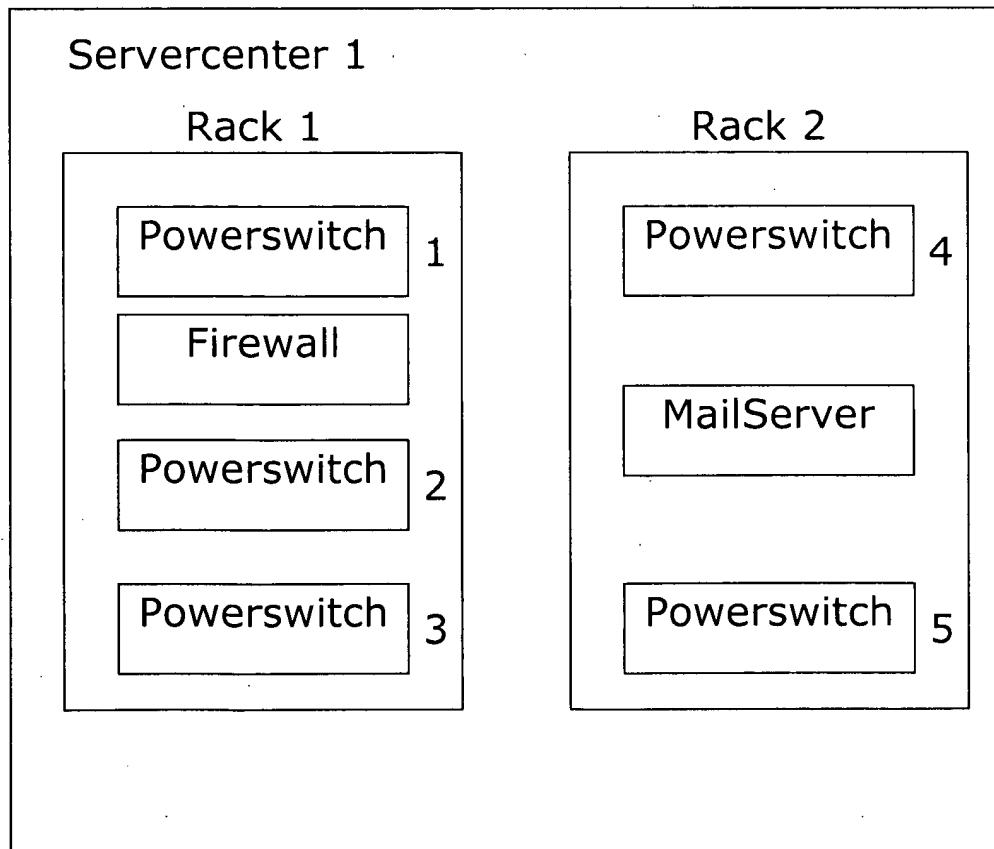


Fig. 8

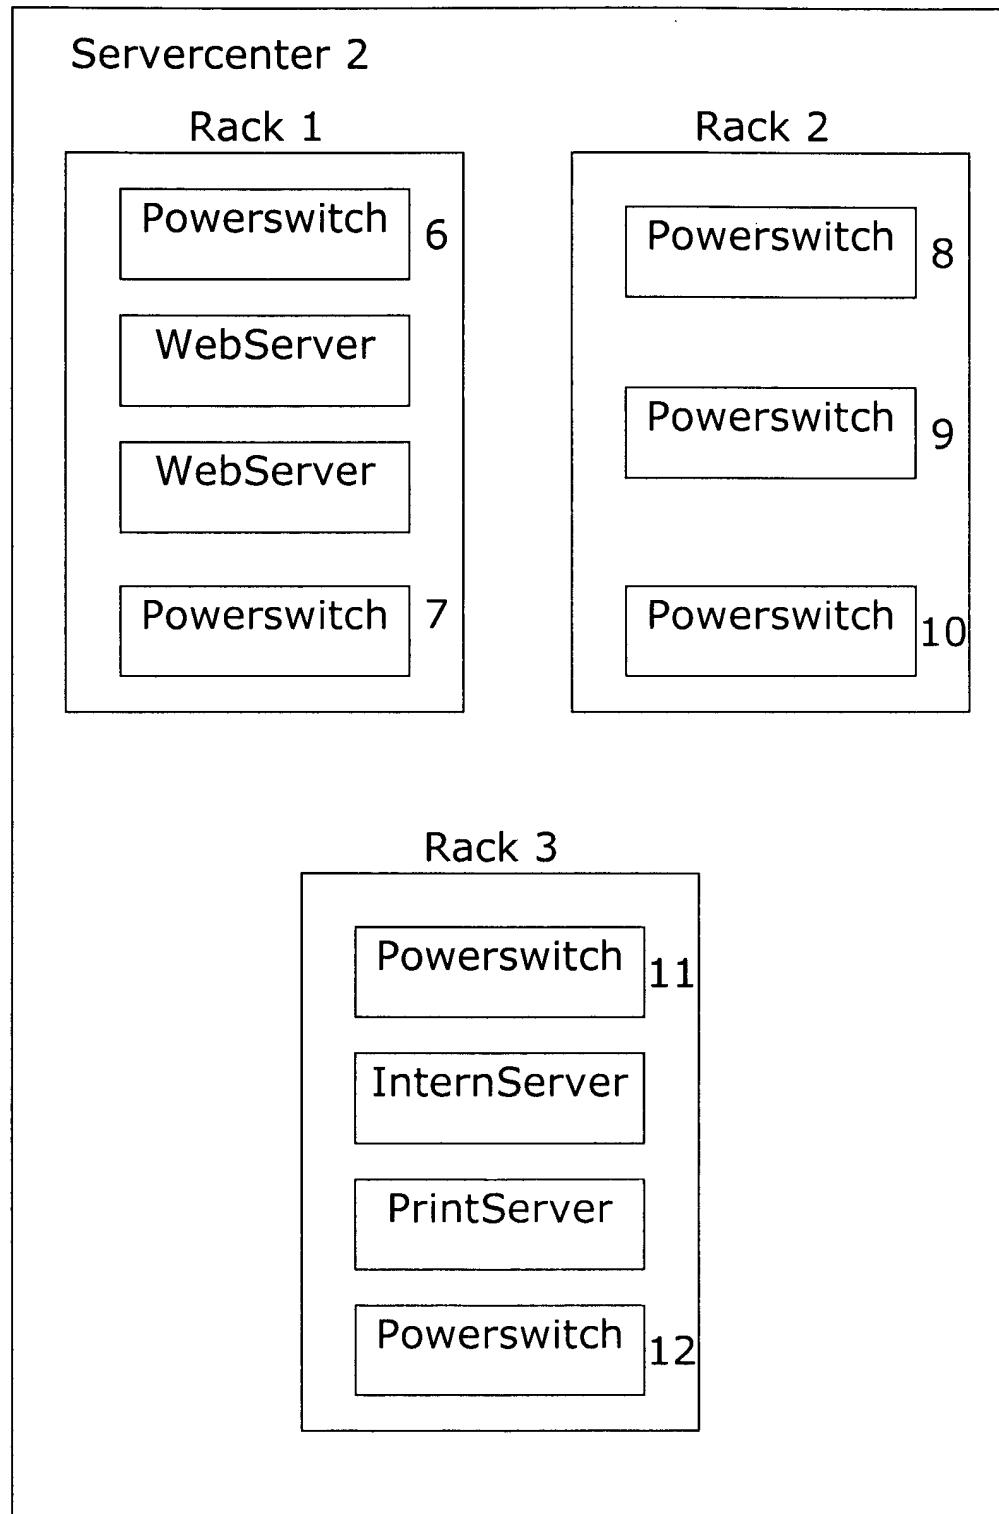


Fig. 26b

Fig. 27

Drag column header here to group by that column			
Servercenter	Rack	Outlet	Powerswitch
Servercenter 1	Rack 1	Outlet 1 - Firewall	Powerswitch 1
Servercenter 1	Rack 2	Outlet 4 - Mailserver	Powerswitch 4
Servercenter 2	Rack 1	Outlet 3 - Web server	Powerswitch 6
Servercenter 2	Rack 1	Outlet 4 - Web server	Powerswitch 6
Servercenter 2	Rack 3	Outlet 0 - Intern S	Powerswitch 11
Servercenter 2	Rack 3	Outlet 1 - Print S	Powerswitch 11


Fig. 28

Servercenter			
Servercenter	Rack	Outlet	Powerswitch
- Servercenter: Servercenter 1			
Servercenter 1	Rack 1	Outlet 1 - Firewall	Powerswitch 1
Servercenter 1	Rack 2	Outlet 4 - Mailserver	Powerswitch 4
- Servercenter: Servercenter 2			
Servercenter 2	Rack 1	Outlet 3 - Web server	Powerswitch 6
Servercenter 2	Rack 1	Outlet 4 - Web server	Powerswitch 6
Servercenter 2	Rack 3	Outlet 0 - Intern Serv	Powerswitch 11
Servercenter 2	Rack 3	Outlet 1 - Print server	Powerswitch 11

Fig. 29

Servercenter			
Rack		Outlet	Powerswitch
Servercenter	Rack		
- Servercenter: Servercenter 1			
- Rack: Rack 1			
Servercenter 1	Rack 1	Outlet 1 - Firewall	Powerswitch 1
- Rack: Rack 2			
Servercenter 1	Rack 2	Outlet 4 - Mailser	Powerswitch 4
- Servercenter: Servercenter 2			
- Rack: Rack 3			
Servercenter 2	Rack 3	Outlet 0 - InternSe	Powerswitch 11
- Rack: Rack 1			
Servercenter 2	Rack 1	Outlet 3 - Web se	Powerswitch 6
Servercenter 2	Rack 1	Outlet 4 - Web se	Powerswitch 6
- Rack: Rack 3			
Servercenter 2	Rack 3	Outlet 1 - Print se	Powerswitch 11

Fig. 30

Servercenter			
			
Servercenter	Rack	Outlet	Powerswitch
- Servercenter: Servercenter 1			
- Rack: Rack 1			
- Powerswitch: Powerswitch 1			
Servercenter 1	Rack 1	Outlet 1 - Firewall	Powerswitch 1
- Rack: Rack 2			
- Powerswitch: Powerswitch 4			
Servercenter 1	Rack 2	Outlet 4 - Mailser	Powerswitch 4
- Servercenter: Servercenter 2			
- Rack: Rack 3			
- Powerswitch: Powerswitch 11			
Servercenter 2	Rack 3	Outlet 0 - InternSe	Powerswitch 11
- Rack: Rack 1			
- Powerswitch: Powerswitch 6			
Servercenter 2	Rack 1	Outlet 3 - Web se	Powerswitch 6
Servercenter 2	Rack 1	Outlet 4 - Web se	Powerswitch 6
- Rack: Rack 3			
- Powerswitch: Powerswitch 11			
Servercenter 2	Rack 3	Outlet 1 - Print se	Powerswitch 11

18/24

Fig. 31

Wallet creation
Choose user name
Text1
Choose password
Password
Password again
Create Wallet
OR
Import Wallet

Fig. 32

Login	
User Name:	<input type="text"/>
Password:	<input type="password"/>
<input type="button" value="OK"/>	<input type="button" value="Cancel"/>

Fig. 33

Tasks	Devices
	IP addr. Mac addr. Name Product
Conf. IP Settings	
Device Info	
Reboot Device	
Refresh List	
Close	


Fig. 34

Set IP Address

Assign an IP address, subnet mask and gateway to your ICU. Contact your network administrator if you do not know this information

Product	IPWRSwitch8
MAC Address	XXXXXXXXXX
<input checked="" type="radio"/> Automatically obtain network settings via DHCP	
<input type="radio"/>	Manually configure network settings
	IP Address YYYYYYYYYY
	Subnet Mask ZZZZZZZZ
	Default Gateway SSSSSSSS
Username:	<input type="text"/>
Password:	<input type="text"/>
<input type="button" value="Apply"/>	<input type="button" value="Cancel"/>

Fig. 35

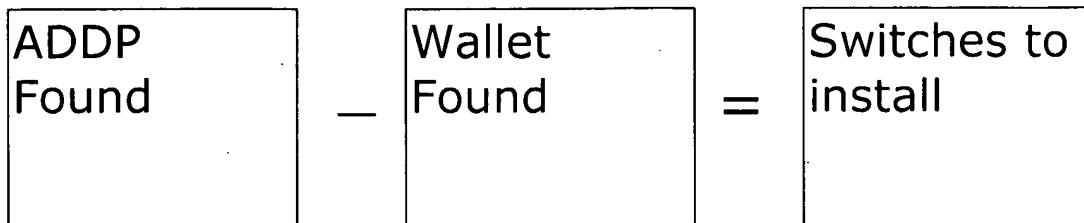

Problems:

- 1 Switches not to be installed
<scan> tag
- 2 Switches that can not be contacted

Fig. 36



Outlet

Fig. 37

#	State	Name	Usage/load
1	<input checked="" type="checkbox"/> ON	mySql Server 1	0,2
2	<input checked="" type="checkbox"/> ON	DNS Server 1	0,8
3	<input type="checkbox"/> OFF	DNS Server 2	0,8
4	<input checked="" type="checkbox"/> ON	Valhalla	0,4
5	<input checked="" type="checkbox"/> ON	THOR	0,2
6	<input checked="" type="checkbox"/> ON	PIX firewall	0,2
7	<input checked="" type="checkbox"/> ON	Switch	0,2
8	<input checked="" type="checkbox"/> ON	Cisco 7200	0,2
<input checked="" type="checkbox"/> Action			3,0

Fig. 38

48 BIT serial number							
8 BIT family code	8 BIT CRC						
8 BIT	8 BIT	8 BIT	8 BIT	8 BIT	8 BIT	8 BIT	8 BIT

Fig. 39

The diagram illustrates a login interface. It consists of a large rectangular frame containing three distinct input fields. The first field, labeled 'Username', is positioned at the top. The second field, labeled 'Password', is located directly below it. The third field, labeled 'login', is at the bottom right, accompanied by a small square button with a right-pointing arrow.

22/24

Fig. 40

Name/Location			
Outlet Sensor Log Update			
Outlet			
#	State	Name	Usage/load
1	✗ ON	mySql Server 1	0,2
2	✗ ON	DNS Server 1	0,8
3	□ OFF	DNS Server 2	0,8
4	✗ ON	Valhalla	0,4
5	✗ ON	THOR	0,2
6	✗ ON	PIX firewall	0,2
7	✗ ON	Switch	0,2
8	✗ ON	Cisco 7200	0,2
✗ Action  			3,0
Warnings			
Sensor	Threshold	Value	
Temperature DNS 1	32	33	
Dry-contact rack	0	1	
Parametere			
MAC: A0:22:55:AD:6A:FF			

Fig. 41

Name/Location	
Outlet Sensor Log Update	
Sensor	Value
Temperature DNS 1	23
Temperature DNS 1	22
Temperature Mysql	22
Dry-Contact rack	0

Fig. 42

Name/Location
Outlet Sensor Log Update
Action Log
Mysql power recycle
DNS 1 power ON
DNS 1 power OFF
Powersequence ON
Brownout

Fig. 43


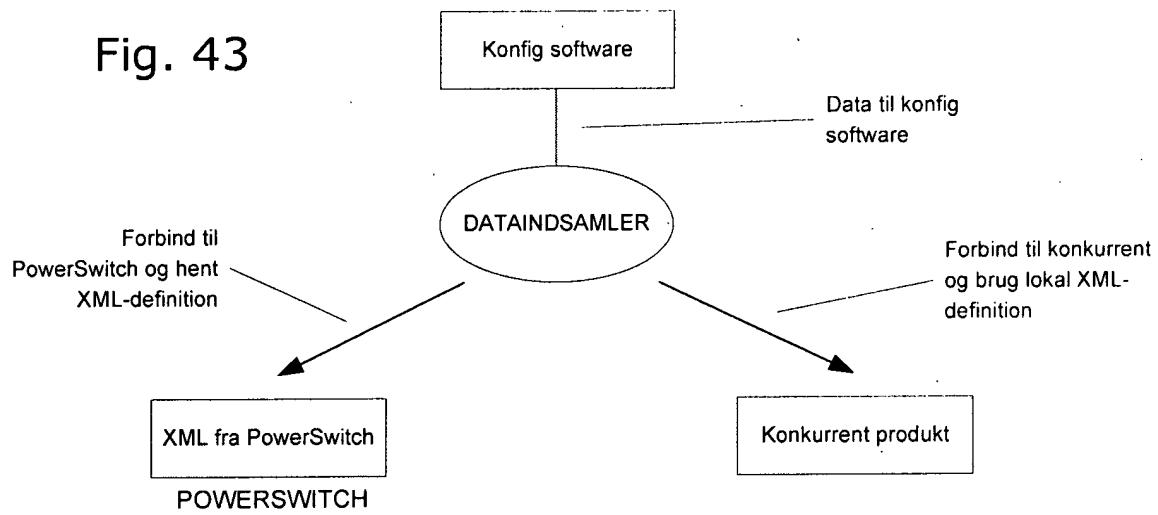


Fig. 44



24/24

Fig. 45

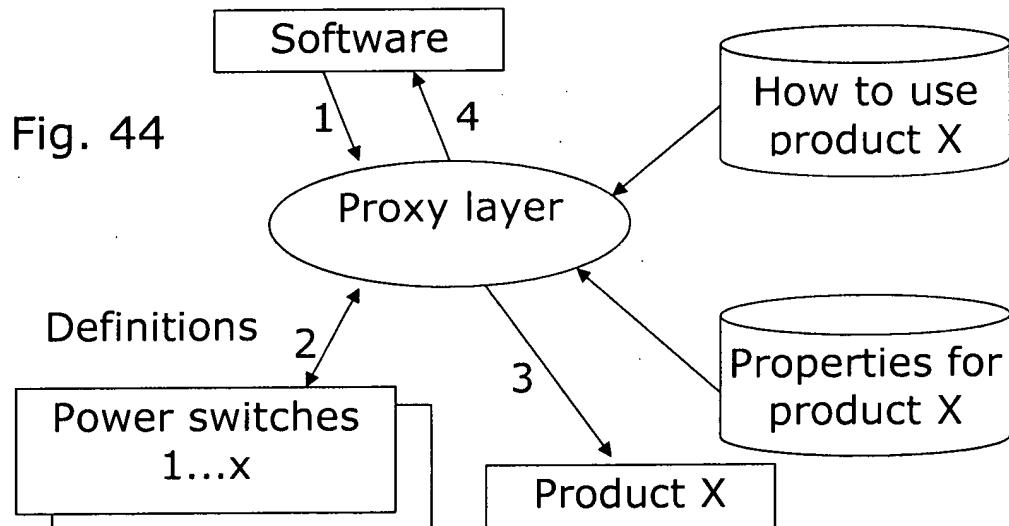